


## MBR1060CT&MBR1060FCT


### 10.0AMPS. SCHOTTKY BARRIER RECTIFIERS

#### FEATURE

- . High current capability
- . Low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed  
260°C /10seconds, 0.25"(6.35mm)from case.




TO-220AB-3L  
MBR1060CT



TO-220F-3L  
MBR1060FCT

#### MECHANICAL DATA

- . Case: Molded with UL-94 Class V-0 recognized  
Flame Retardant Epoxy
- . Mounting position: any



Single phase, half wave, 60Hz,resistive or inductive load.

For capacitive load, derate current by 20%

#### MAXIMUM RATINGS (T<sub>C</sub>=25°C unless otherwise noted)

| Parameter  | Symbol         | MBR1060CT&MBR1060FCT | Units |
|--|----------------|----------------------|-------|
| Maximum Recurrent Peak Reverse Voltage   | $V_{RRM}$      | 60                   | V     |
| Maximum RMS Voltage  | $V_{RMS}$      | 42                   | V     |
| Maximum DC blocking Voltage  | $V_{DC}$       | 60                   | V     |
| Maximum Average Forward Rectified Current <i>Per Leg</i><br>At T <sub>C</sub> =100°C <i>Total device</i>           | $I_{F(AV)}$    | 5.0<br>10.0          | A     |
| Peak Forward Surge Current 8.3ms single half sine-wave<br>superimposed on rated load (JEDEC method) <i>Per Leg</i> | $I_{FSM}$      | 120.0                | A     |
| Typical Junction Capacitance (Note 1)  | $C_J$          | 284                  | pF    |
| Operation Junction Temperature and Storage Temperature   | $T_J, T_{STG}$ | -55 to +150          | °C    |

#### ELECTICAL CHARACTERISTICS-(per leg) (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter               | Symbol | Test conditions       | Typ                 | Max  | Units |    |
|-------------------------|--------|-----------------------|---------------------|------|-------|----|
| Forward voltage drop    | $V_F$  | T <sub>J</sub> =25°C  | I <sub>F</sub> =3A  | 0.54 | ---   | V  |
|                         |        |                       | I <sub>F</sub> =5A  | 0.61 | 0.71  |    |
|                         |        | T <sub>J</sub> =125°C | I <sub>F</sub> =3A  | 0.48 | ---   |    |
|                         |        |                       | I <sub>F</sub> =5A  | 0.54 | 0.64  |    |
| Reverse leakage current | $I_R$  | T <sub>J</sub> =25°C  | V <sub>R</sub> =60V | ---  | 100   | μA |
|                         |        | T <sub>J</sub> =125°C | V <sub>R</sub> =60V | ---  | 20    | mA |

#### THERMAL CHARACTERISTICS(T<sub>C</sub>=25°C unless otherwise noted)

| Parameter                           | Symbol     | MBR1060CT | MBR1060FCT | Units |
|-------------------------------------|------------|-----------|------------|-------|
| Typical Thermal Resistance (Note 2) | $R_{(JC)}$ | 2.0       | 3.0        | °C/W  |

#### Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Case

RATING AND CHARACTERISTIC CURVE

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

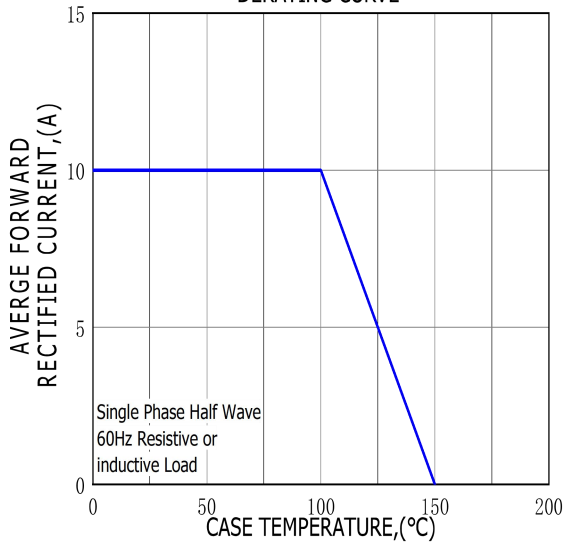


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

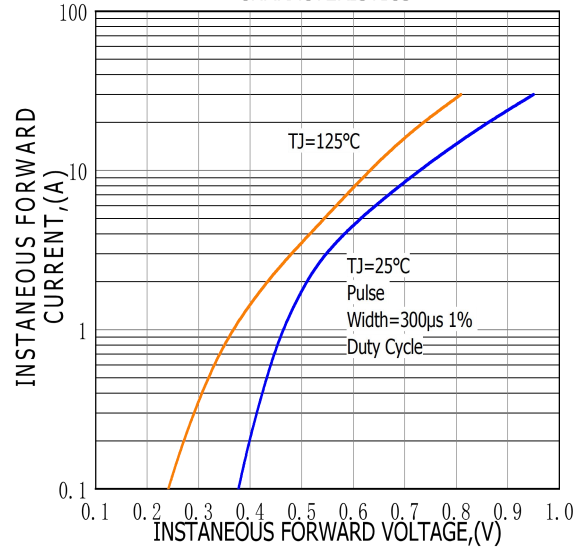


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT





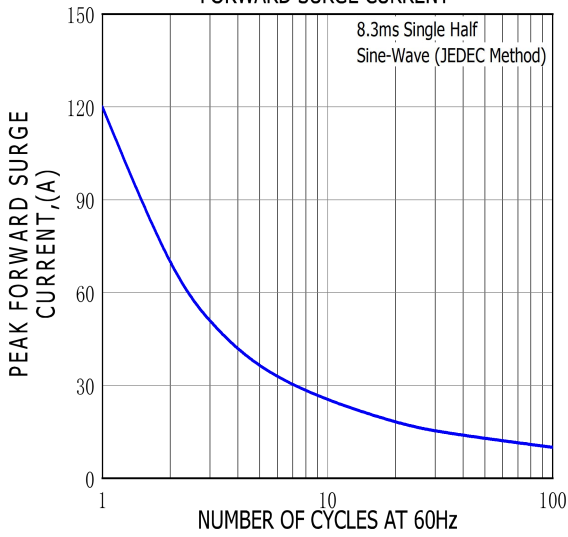



FIG.4-TYPICAL REVERSE CHARACTERISTICS

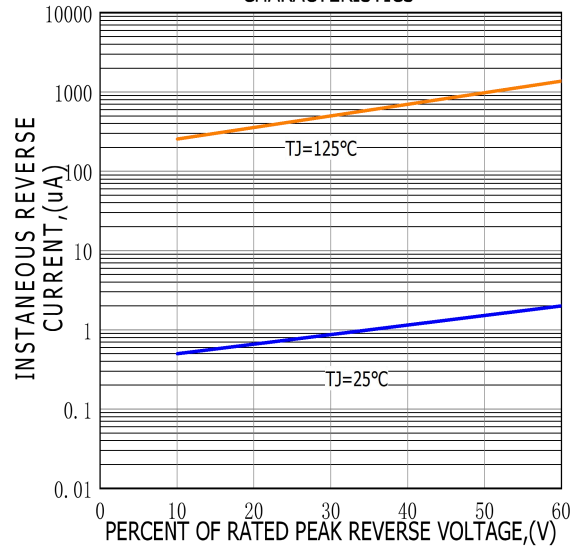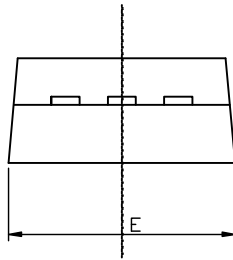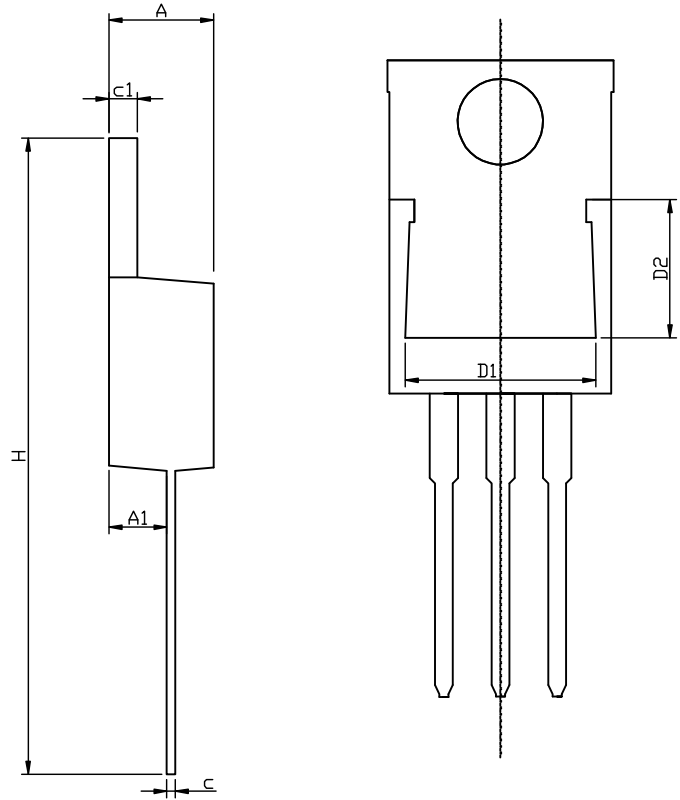

# TO-220AB-3L PACKAGE OUTLINE

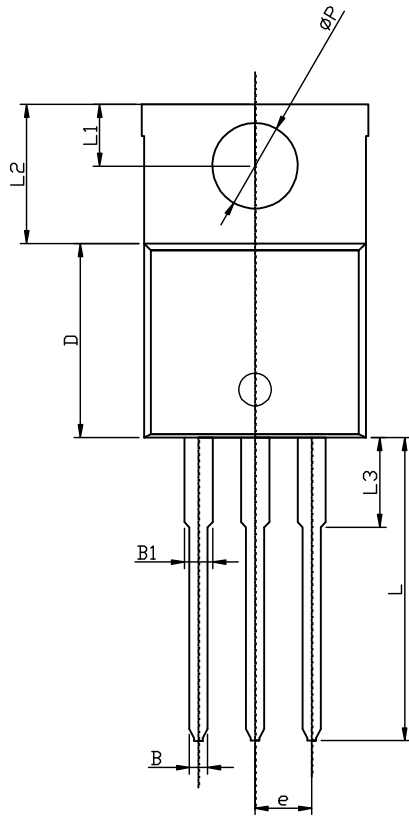




RECOMMENDED LAND PATTERN

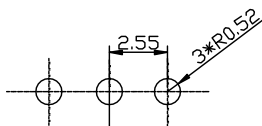


UNIT: mm

|    | MIN   | NOM   | MAX   |
|----|-------|-------|-------|
| A  | 4.50  | 4.70  | 4.90  |
| A1 | 2.45  | 2.60  | 2.70  |
| B  | 0.72  | 0.82  | 0.92  |
| B1 | 1.12  | 1.27  | 1.42  |
| c  | 0.28  | 0.38  | 0.48  |
| c1 | 1.17  | 1.27  | 1.37  |
| D  | 8.46  | 8.66  | 8.86  |
| D1 | 7.90  | 8.10  | 8.40  |
| D2 | 5.50  | 5.70  | 5.90  |
| e  | 2.45  | 2.55  | 2.65  |
| E  | 9.85  | 10.15 | 10.45 |
| H  | 28.00 | 28.50 | 29.00 |
| ΦP |       | 3.84  |       |
| L  | 13.1  | 13.6  | 14.1  |
| L1 | 2.54  | 2.74  | 2.94  |
| L2 | 6.04  | 6.24  | 6.44  |
| L3 | 3.85  | 4.05  | 4.35  |

# TO-220F-3L PACKAGE OUTLINE

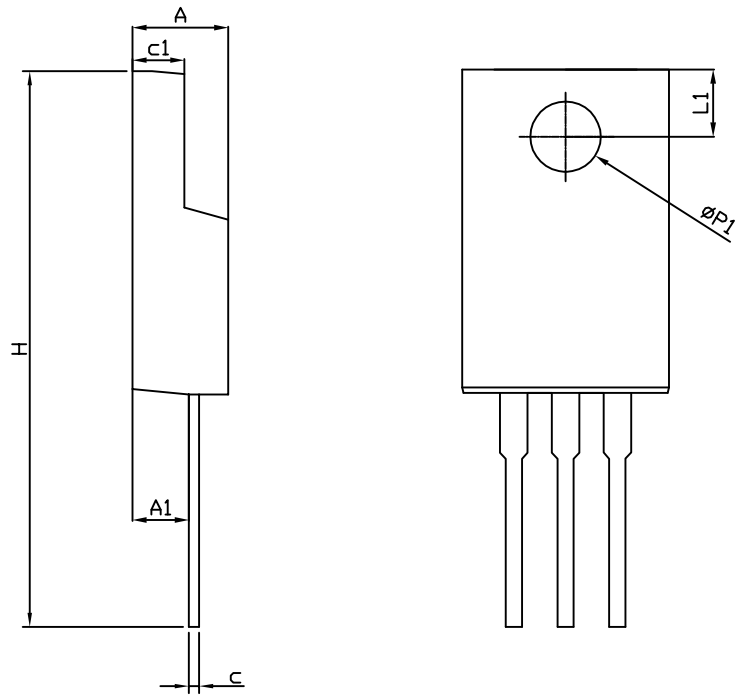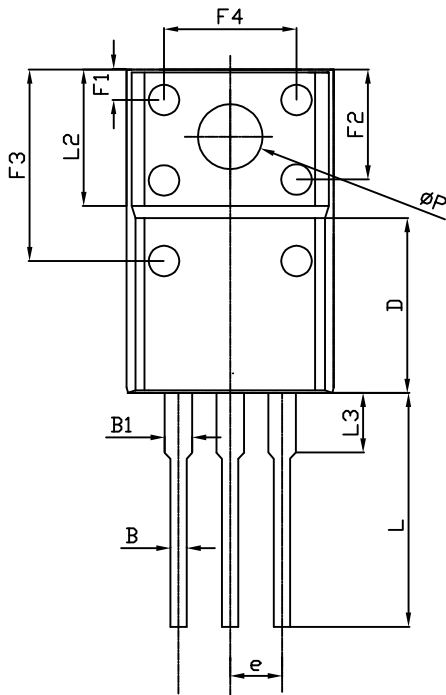

RECOMMENDED LAND PATTERN

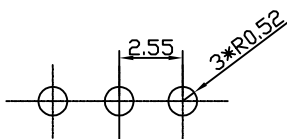

UNIT: mm

|           | MIN   | NOM     | MAX   |
|-----------|-------|---------|-------|
| A         | 4.40  | 4.60    | 4.80  |
| A1        | 2.63  | 2.76    | 2.89  |
| B         | 0.75  | 0.80    | 0.90  |
| B1        | 1.12  | 1.27    | 1.42  |
| c         | 0.40  | 0.50    | 0.60  |
| c1        | 2.60  | 2.70    | 2.80  |
| D         | 7.50  | 7.80    | 8.10  |
| e         | -     | 2.55REF | -     |
| E         | 9.86  | 10.00   | 10.10 |
| F1        | 1.90  | 2.12    | 2.40  |
| F2        | 5.00  | 5.30    | 5.65  |
| F3        | 8.70  | 9.00    | 9.30  |
| F4        | 6.20  | 6.50    | 6.80  |
| H         | 27.80 | 28.30   | 28.80 |
| L         | 13.10 | 13.30   | 13.50 |
| L1        | 2.85  | 3.00    | 3.15  |
| L2        | -     | 6.70REF | -     |
| L3        | 2.80  | 3.10    | 3.40  |
| $\Phi P$  | 3.00  | 3.30    | 3.60  |
| $\Phi P1$ | 2.80  | 3.10    | 3.40  |